



SITE LAYOUT - LEGEND

- 5" ASPHALTIC CONCRETE PAVEMENT
- 6" DENSE GRADED BASE
- 12" GRANULAR FILL
- 3" ASPHALTIC CONCRETE PAVEMENT
- 3" GRANULAR FILL
- 12" GRANULAR FILL
- 6" GEOTEXTILE FABRIC
- GEOTEXTILE FABRIC
- MASON SAND
- 6" LIMESTONE SCREENINGS
- 6" - 12" MEDIUM RIP RAP UNDER BLEACHERS
- SEDED ATHLETIC TURF
- PLACE 6" OF AMENDED TOP SOIL
- SYNTHETIC TURF FIELD (BY OTHERS)
- 6" BASE DRAINAGE STONE
- 6" GEOTEXTILE FABRIC

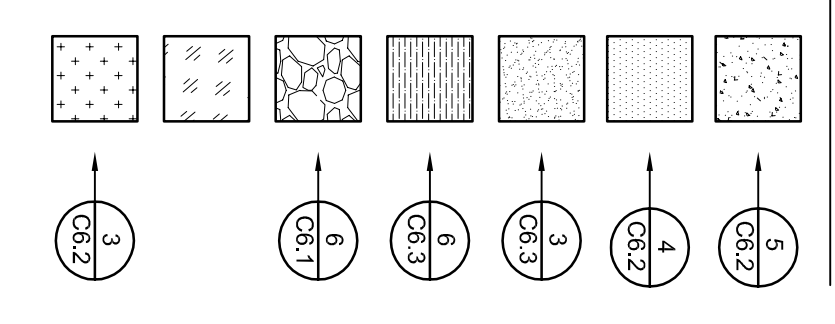

GENERAL NOTES

1. CONTRACTOR SHALL CONTACT DIGGERS HOTLINE 5 WORKING DAYS PRIOR TO THE START OF CONSTRUCTION.
2. THE START OF CONSTRUCTION SHALL BE THE DATE OF THE PERMIT TO CONSTRUCT.
3. ALL PROPOSED DIMENSIONS ARE REFERENCED PARALLEL OR PERPENDICULAR TO THE START OF REVISION/CONSTRUCTION.
4. GRADE LINE AND LEVEL SHALL BE REVIEWED IN THE FIELD BY THE PROJECT ENGINEER.
5. SEEDING, FERTILIZING AND GRASS MULCH ALL GENERAL LANDSCAPE AREAS DISTURBED DURING CONSTRUCTION IN ACCORDANCE WITH THE PROJECT SPECIFICATIONS SHALL BE REVIEWED IN THE FIELD BY THE PROJECT ENGINEER.
6. ALL CONTRACTORS SUBMITTING A BID SHALL VISIT THE SITE AND REVIEW THE EXISTING SITE CONDITIONS PRIOR TO SUBMITTING A BID.

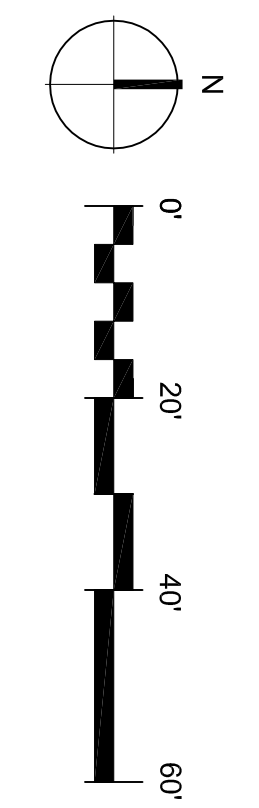

RETTLER CORPORATION HAS PREPARED THIS DESIGN TO ASSIST IN THE DEVELOPMENT OF THE PROJECT. IT IS NOT TO BE USED FOR ANY OTHER PURPOSES WITHOUT THE WRITTEN PERMISSION OF RETTLER CORPORATION, INC.